


LED DOWLIGHTS



Innovative split design of led light engine and trim

The split design features an advanced LED light engine mounted directly to the aluminum haze trim with integral white trim ring. Traditional recessed housing frame-in-kind is eliminated.

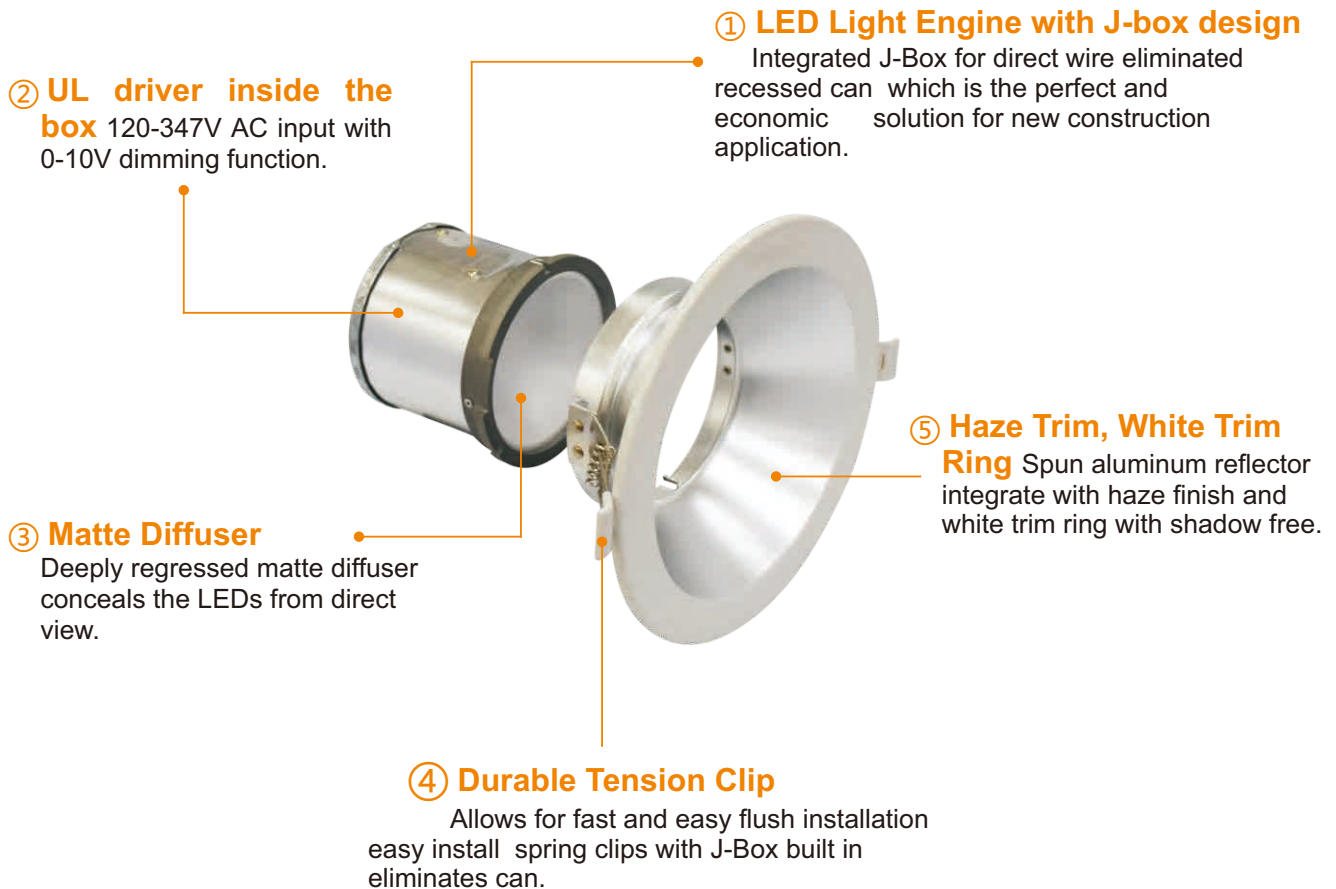

ILLUMINATION

Eye-Pleasing Lighting Features


White baffle trim reduces glare, resulting in soft, even illumination that blends seamlessly with any interior.



Specification


• Dimensions

4 inch

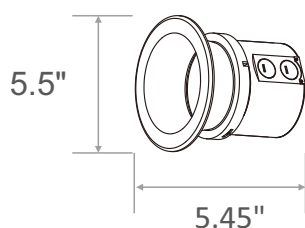


4 fits 4.7"min.to 5.3" max. mounting frame diameters.

6 inch

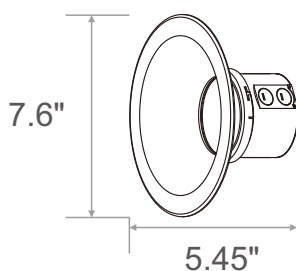

6 fits 6"min.to 7.5" max. mounting frame diameters.

8 inch

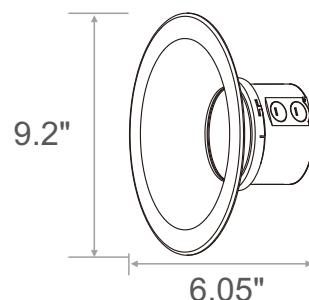


8 fits 7.4"min.to 8.9" max. mounting frame diameters.


• Performance

Model	CPS-D10W-XXX			CPS-D15W-XXX			CPS-D20W-XXX		
Size Options	4"	6"	8"	4"	6"	8"	4"	6"	8"
Efficacy	78 lm/w	82 lm/w	83 lm/w	78 lm/w	81 lm/w	82 lm/w	76 lm/w	79 lm/w	80 lm/w
Luminous Flux	780 lm	820 lm	830 lm	1170 lm	1215 lm	1230 lm	1520 lm	1580 lm	1600 lm
Input Power	10 W			15 W			20 W		
Input Voltage	120-347V AC			120-347V AC			120-347V AC		
CRI	Ra>80			Ra>80			Ra>80		
CCT Options	3000K, 3500K, 4000K, 5000K			3000K, 3500K, 4000K,			3000K, 3500K, 4000K,		
Dimming	0-10V			5000K 0-10V			5000K 0-10V		
THD	<20%			<20%			<20%		
PF	>0.9			>0.9			>0.9		
Limited	5 Years			5 Years			5 Years		
Warranty L70	L70>35000 hrs			L70>35000 hrs			L70>35000 hrs		
hrs Mounting	Recessed			Recessed			Recessed		
Beam Angle	65 degrees for 4", 70 degrees for 6", 75 degrees for 8"			65 degrees for 4", 70 degrees for 6", 75 degrees for 8"			65 degrees for 4", 70 degrees for 6", 75 degrees for 8"		
UL Listed Energy	YES			YES			YES		
Star Listed LM79	YES			YES			YES		
Report Damp	YES			YES			YES		
Rated	YES			YES			YES		


• Light Distribution

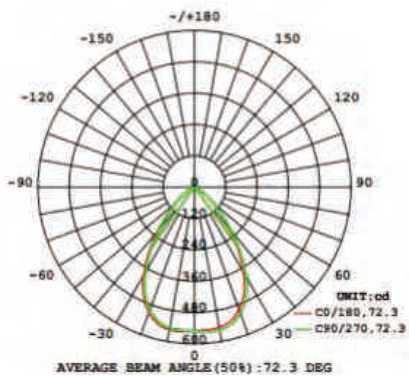

4" 10W

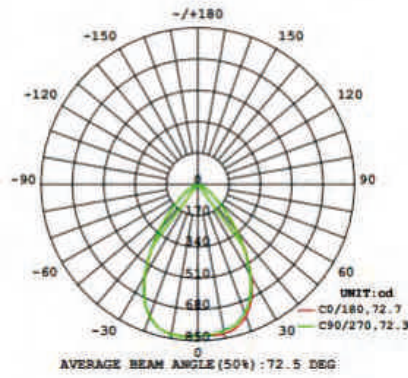

4" 15W

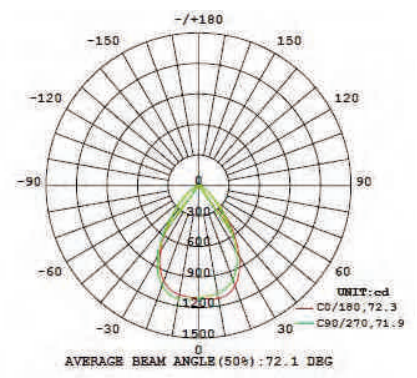

4" 20W

Applications

